



Desmoseal[®] S

Silane-terminated polyurethanes
(STPs) for sealants & adhesives




Desmoseal® S

Silane-terminated polyurethanes (STPs)

for sealants & adhesives

Product	Delivery form	Viscosity at 23°C [mPa · s]	Main application area
Desmoseal® S XP 2774	100%	Approx. 50,000	Low-modulus sealants with very high elongation
Desmoseal® S XP 2636	100%	30,000–50,000	Low-modulus sealants and elastic adhesives with high elongation
Desmoseal® S XP 2458	90% in Mesamoll	26,000–50,000	High-modulus sealants and adhesives with medium elongation
Desmoseal® S 2876	100%	Approx. 25,000	High-modulus sealants and adhesives with medium elongation
Desmoseal® S XP 2749	100%	4,400–5,800	Plasticizer-free adhesives with high hardness
Desmoseal® S XP 2821	100%	Approx. 20,000	Structural adhesives with high tensile strength and lap shear strength

STP formulation range

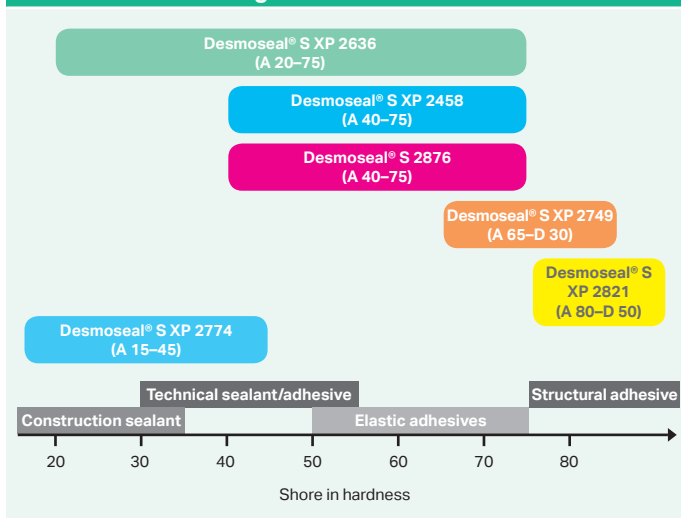

Silane-terminated polyurethanes (STP/Desmoseal® S) combine the advantages of a polyurethane backbone and a silane-based curing mechanism. That is why STPs provide a unique combination of excellent cohesive strength and good adhesive properties. We offer six Desmoseal® S grades covering the complete application range from low modulus sealants with very high elongation up to structural adhesives with high hardness and high tensile strength.

These products are used to formulate sealants and adhesives for the building and construction industry as well as for industrial and transportation applications. STPs are easily dilutable with various solvents, enabling low viscous formulations, such as sprayable seam sealers or certain coating applications.

The main beneficial properties of Desmoseal® S and corresponding formulations:

- Desmoseal® S types display a good compatibility with a broad range of fillers, plasticizers, adhesion promoters, other additives or solvents
- Desmoseal® S types are highly reactive and thus can be catalyzed with amines or with low amounts of standard organic tin catalysts
- Formulations allow bubble-free curing, even in thick layers
- Formulations show excellent cohesive strength and good adhesive properties

STP formulation examples



Covestro Deutschland AG
Business Unit Coatings,
Adhesives & Specialties
51365 Leverkusen
Germany

www.coatings.covestro.com
cas-info@covestro.com

This information and our technical advice – whether verbal, in writing or by ways of trial – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. The information is provided by Covestro without assumption of any liability. If any of the above mentioned regulations change after the date of declaration, this declaration is no longer valid. Covestro will strive to keep this information up-to-date. Our advice does not release you from the obligation to verify the information provided – especially that contained in our safety data and technical information sheets –, to check for updates of any information provided by us and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery.
Edition: 2019 · Order No.: COV00086531 · Printed in Germany · E