



# Makrolon® for **LED Lighting**

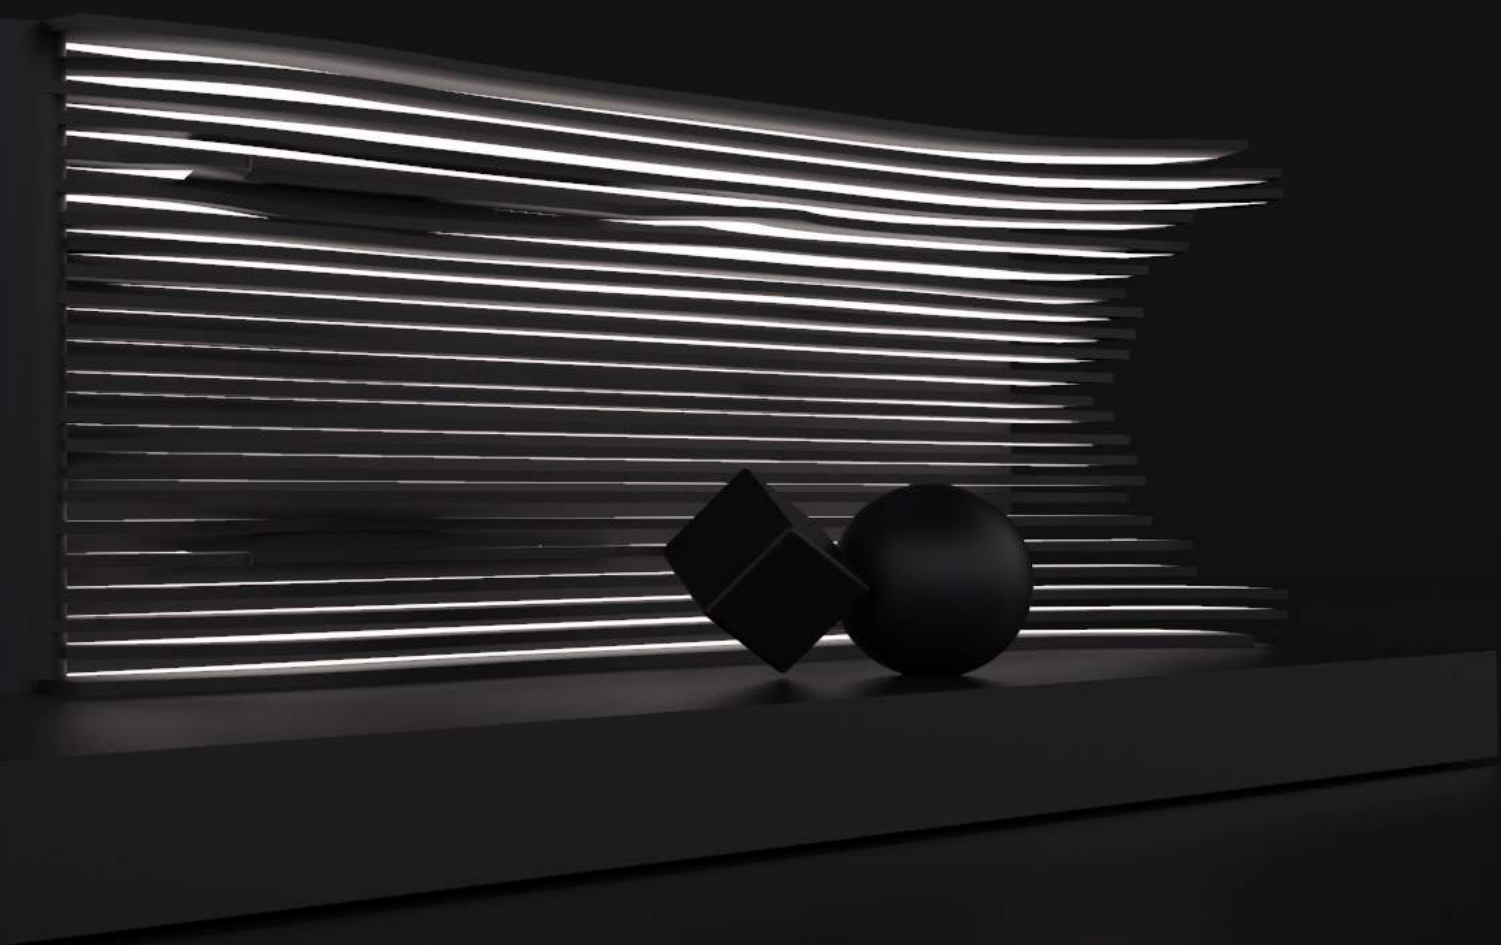

# LED Portfolio Index

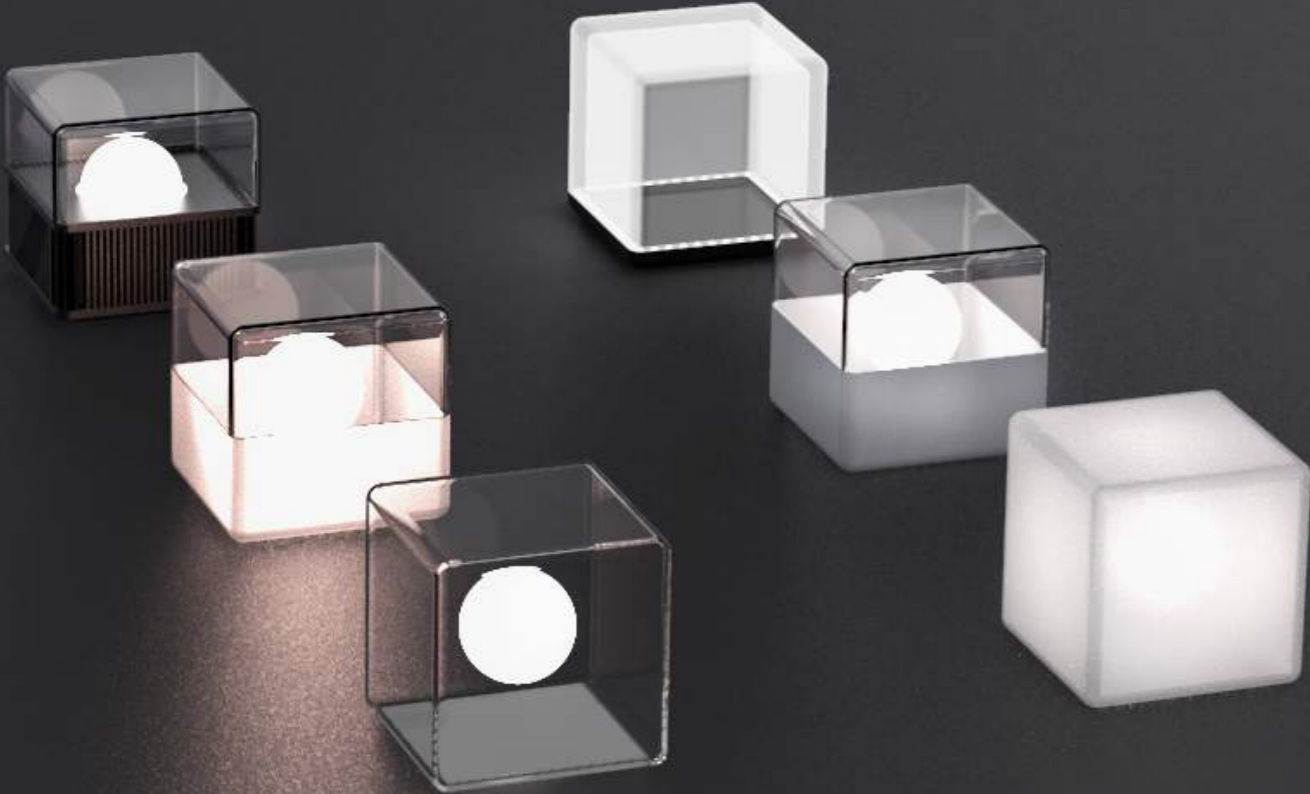

p. 1 Introducing Makrolon® Polycarbonate

p. 3 Transparent



p. 7 Diffusion Quality



p. 11 Flame Retardant



p. 15 Reflective White



p. 19 Thermal Conductive



p. 23 Edge Light Technology



p. 27 About Us

Introducing

# Makrolon® Polycarbonate

## A Building Block for Innovation

A thermoplastic with truly diverse applications, Makrolon® polycarbonate enables efficient design and manufacturing of optical parts for LED powered luminaires. The tailored portfolio of Makrolon® from Covestro for general lighting applications include transparent, translucent, reflective white, thermal conductive and flame retardant grades, which can be used for injection molding and extrusion. Stronger and lighter than glass, polycarbonate also provides energy and CO<sub>2</sub> emission savings. All of which explains why Makrolon® has been trusted for decades and continues to pave the way for tomorrow's lighting innovations.

### Product List



**Makrolon®**  
Transparent Polycarbonate

**LED5102**  
Low viscosity

**LED5202**  
Medium viscosity

**LED5302**  
High viscosity



**Makrolon®**  
Reflective White

**RW2407** 012363  
High reflection

**RW2407** 012612  
Light blocking

**RW6267X** 012363  
High reflection  
Flame retardant



**Makrolon®**  
Diffusion Quality

**DQ5122**  
Low diffusion

**DQ5142**  
Medium diffusion

**DQ5162**  
High diffusion



**Makrolon®**  
Thermal Conductive

**TC611**  
Excellent thermal conductivity

**TC110**  
Electrically insulating

**TP0822**  
Electrically insulating  
Flame retardant



**Makrolon®**  
Flame Retardant

**LED5902 FR**  
High transmission



# Makrolon® LED Transparent

High light transmission across  
the visual spectrum

Good life time performance


High mechanical stability



## Form Your Future


The modern design possibilities for luminaires powered by LEDs are endless. Makrolon® LED5102 provides good flowability, allowing you to injection mold complex geometrics while maintaining high mechanical stability. In case you need additional mechanical performance Makrolon® LED5302 has you covered.





# Makrolon® LED Transparent

Material Properties	Makrolon® LED5102	Makrolon® LED5202	Makrolon® LED5302
MVR [cm³/10 min]	34	19	13
Transmission @ 2 mm	90%	90%	90%
UV stabilized	✓	✓	✓
Yellowness Index @ 2 mm	1	1	1
Haze @ 2 mm	<0.5%	<0.5%	<0.5%
Izod notched impact 23 °C [kJ/m²]	55	69	72

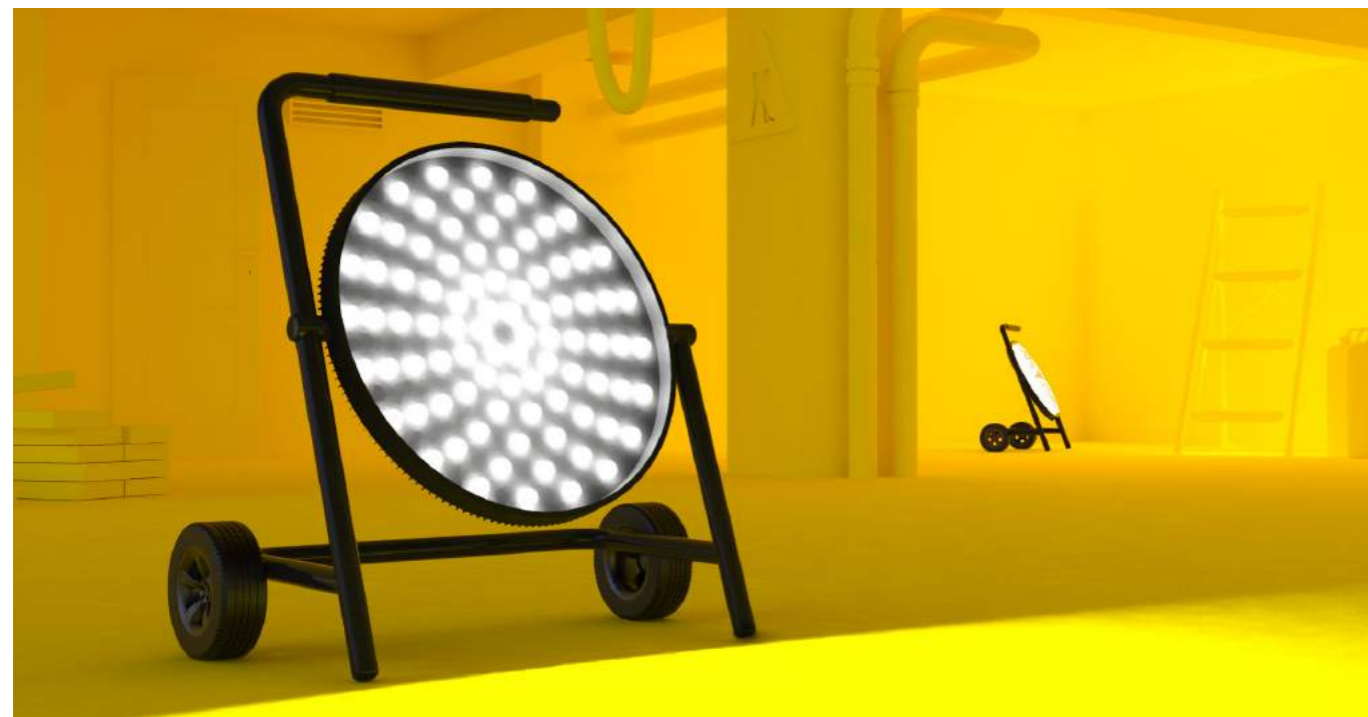

## Shine Brighter

The incredible transparent properties of Makrolon® LED5102, Makrolon® LED5202 and Makrolon® LED5302 let your light shine brighter through both quality and longevity.



Makrolon® DQ

Diffusion Quality




For luminaires with superior lumen output

Customized levels of hiding power

## Transmission is our Vision

With up to 10% more light transmission, Makrolon® DQ improves your luminaire efficacy, allowing you to make more powerful luminaires with the same ability to diffuse light.



# Makrolon® DQ

## Diffusion Quality

Material Properties	Makrolon® DQ5122	Makrolon® DQ5142	Makrolon® DQ5162
HPA* @ 2 mm	19°	43°	56°
Transmission @ 2 mm	85%	65%	57%
UV stabilized	✓	✓	✓
RTI listed 125 °C/115 °C/125 °C	✓	✓	✓
f1 listed	✓	✓	✓
UL94 Classification V-2 0.75-2.0 mm	✓	✓	✓
MVR [cm³/10 min]	34	34	34

\* Half power angle



## Three Grades – Tailored Power

Makrolon® DQ comprises three products with tailored half power angles, offering you the right hiding power for your luminaires. Optimized by data science, we can push light transmission to be best in class.



# Makrolon® FR Flame Retardant

Excellent optical performance

Available in transparent

Strong flame retardance V0 / 5VA

## “Hot” Topic in LED

Trends in LED powered luminaries like miniaturization and functional integration drive the need for flame retardant optics that fulfil demanding flame classifications. Makrolon® LED5902 FR help you to meet these requirement without making compromises in optical performance.






# Makrolon® FR Flame Retardant

Material Properties	Makrolon® LED5902 FR
UL94 Classification	V-0 1.0 mm
MVR [cm³/10 min]	6
Transmission @ 2 mm	89%
UV stabilized	✓
Yellowness Index	1.2
Haze @ 2 mm	<1%

## Don't Learn Safety by Accident.


Being both temperature resistant and capable of high impact strength, Flame Retardant Makrolon® is a perfect option for light and safety in enclosed spaces with strict safety regulations.

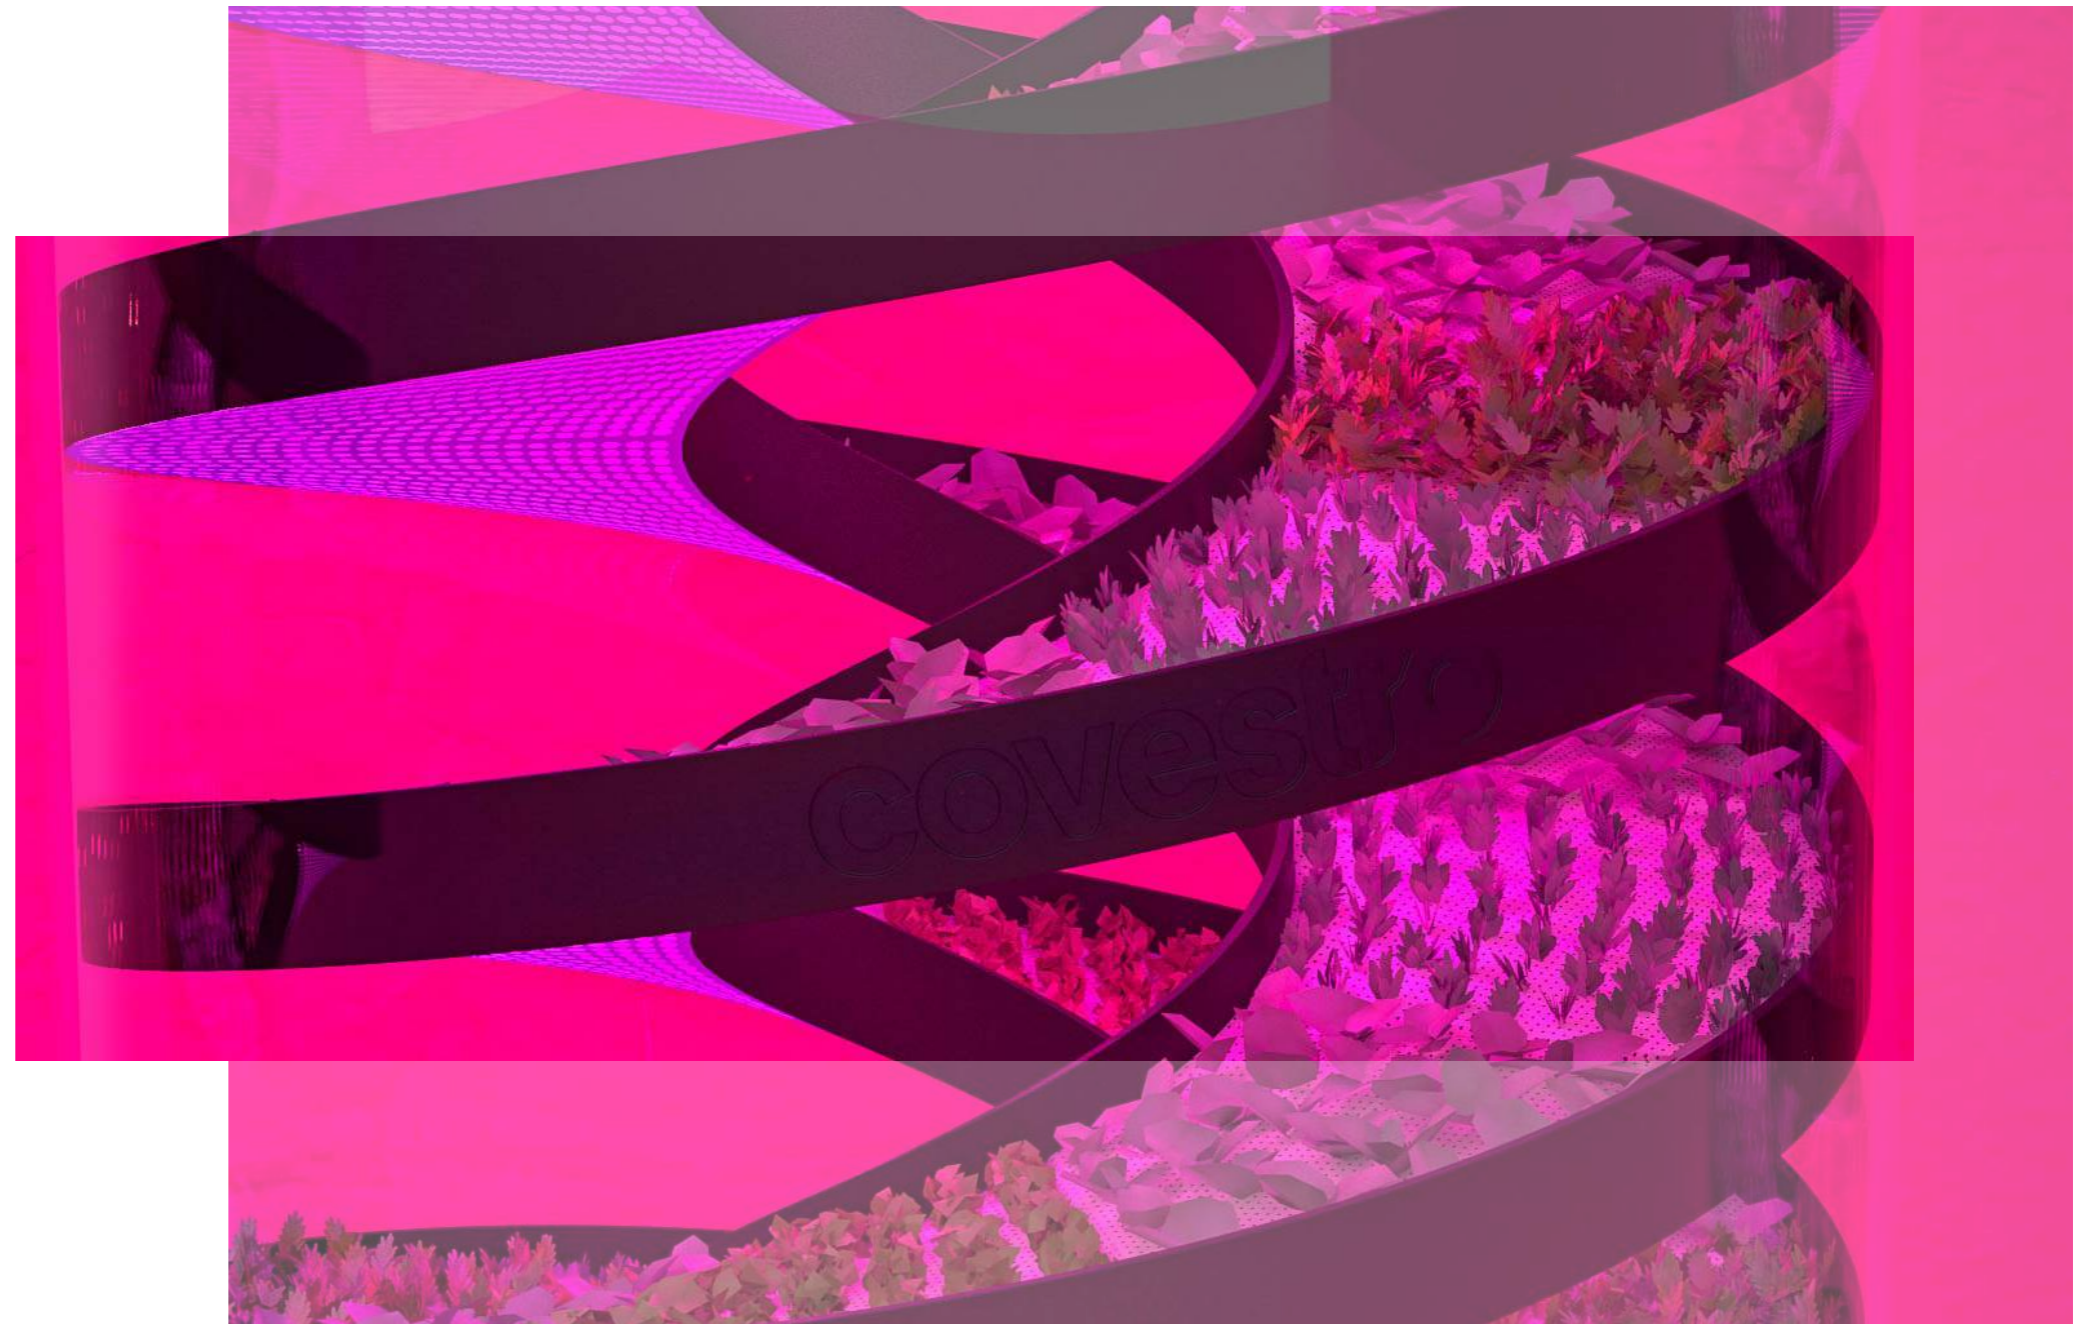



**Makrolon® RW**

**Reflective White**

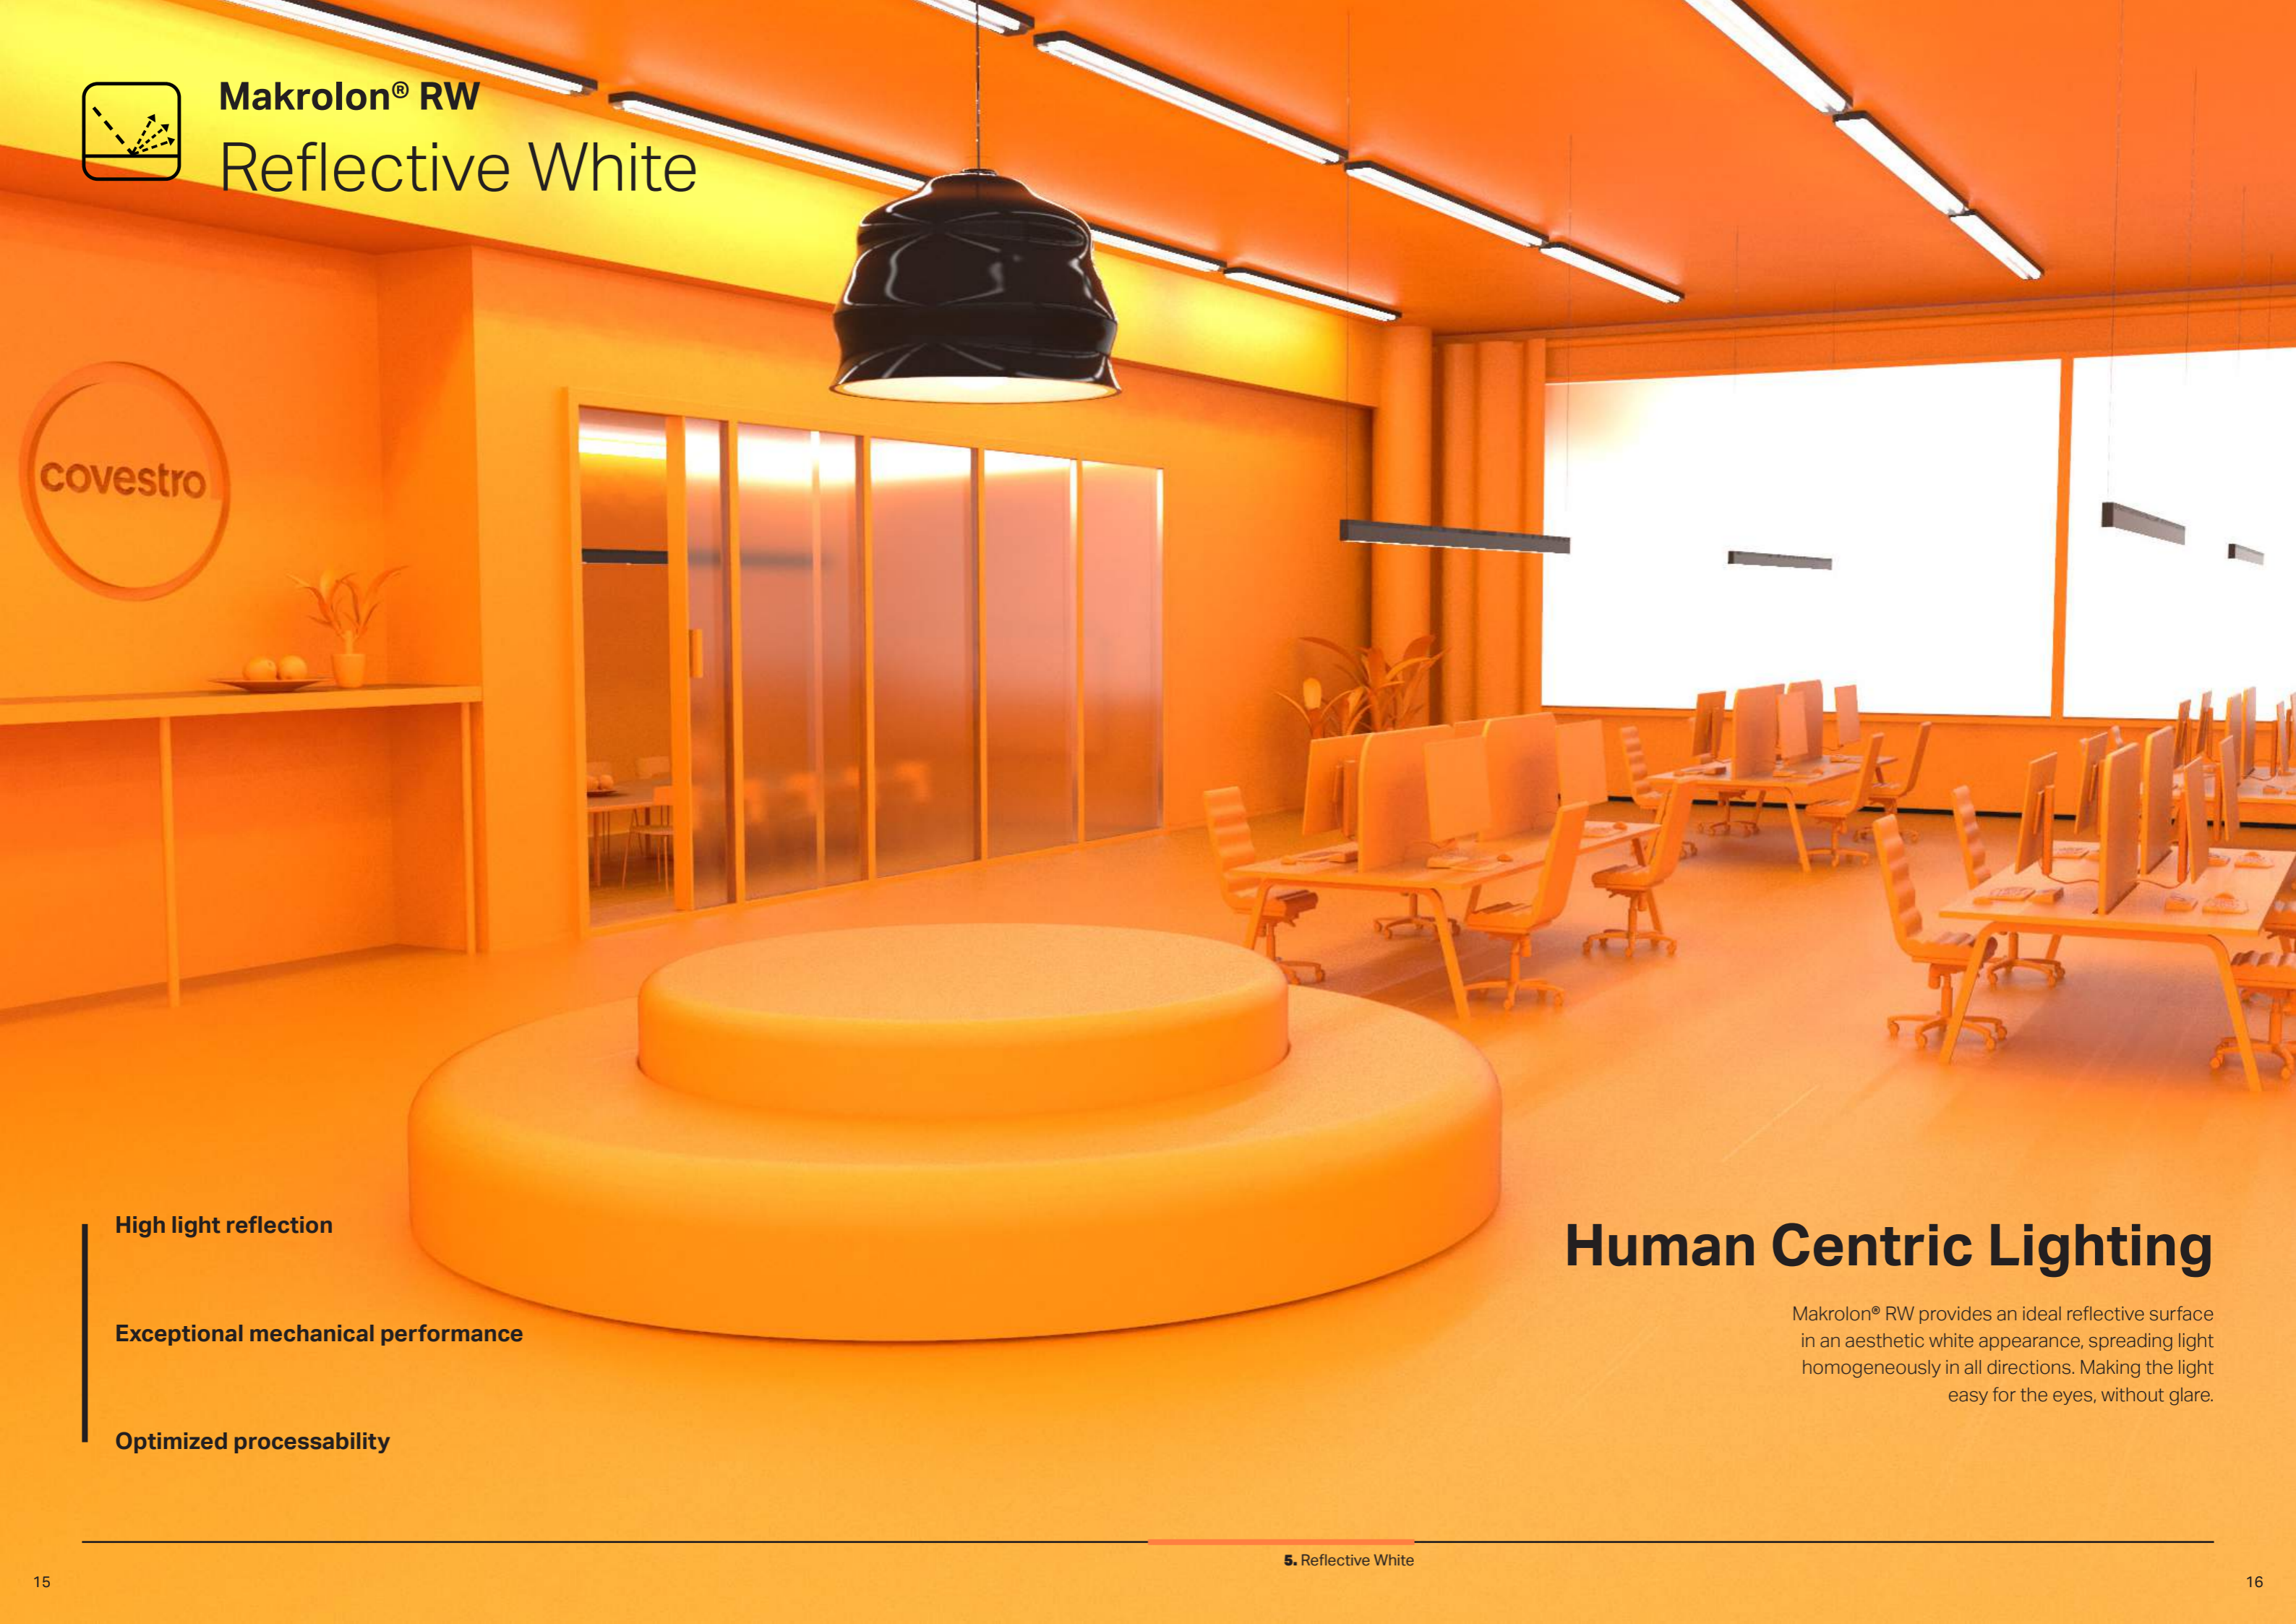

**High light reflection**

**Exceptional mechanical performance**

**Optimized processability**

## **Human Centric Lighting**

Makrolon® RW provides an ideal reflective surface in an aesthetic white appearance, spreading light homogeneously in all directions. Making the light easy for the eyes, without glare.



# Makrolon® RW

## Reflective White

Material Properties	Makrolon® RW2407 012363	Makrolon® RW6267X 012363	Makrolon® RW2407 012612
Total Light Reflection @ 2 mm	96%	96%	86%
UL94 Classification	V-2 1.5 mm	V-0 1.5 mm	V-2 1.5 mm
MVR [cm³/10 min]	19	19	19
UV stabilized	✓	✓	✓
Light blocking Transmission @ 1 mm <0.01%			✓



## Wide Variety for Specific Needs

Makrolon® RW grades are optimized to achieve excellent optical performance without compromise in processability, flame retardance and mechanical performance. The effect of light leakage in reflectors with thin wall thicknesses can be managed by dedicated light blocking products.




Makrolon® TC

Thermal Conductive

Reduces weight

Strong heat transferring capability

High level of design freedom

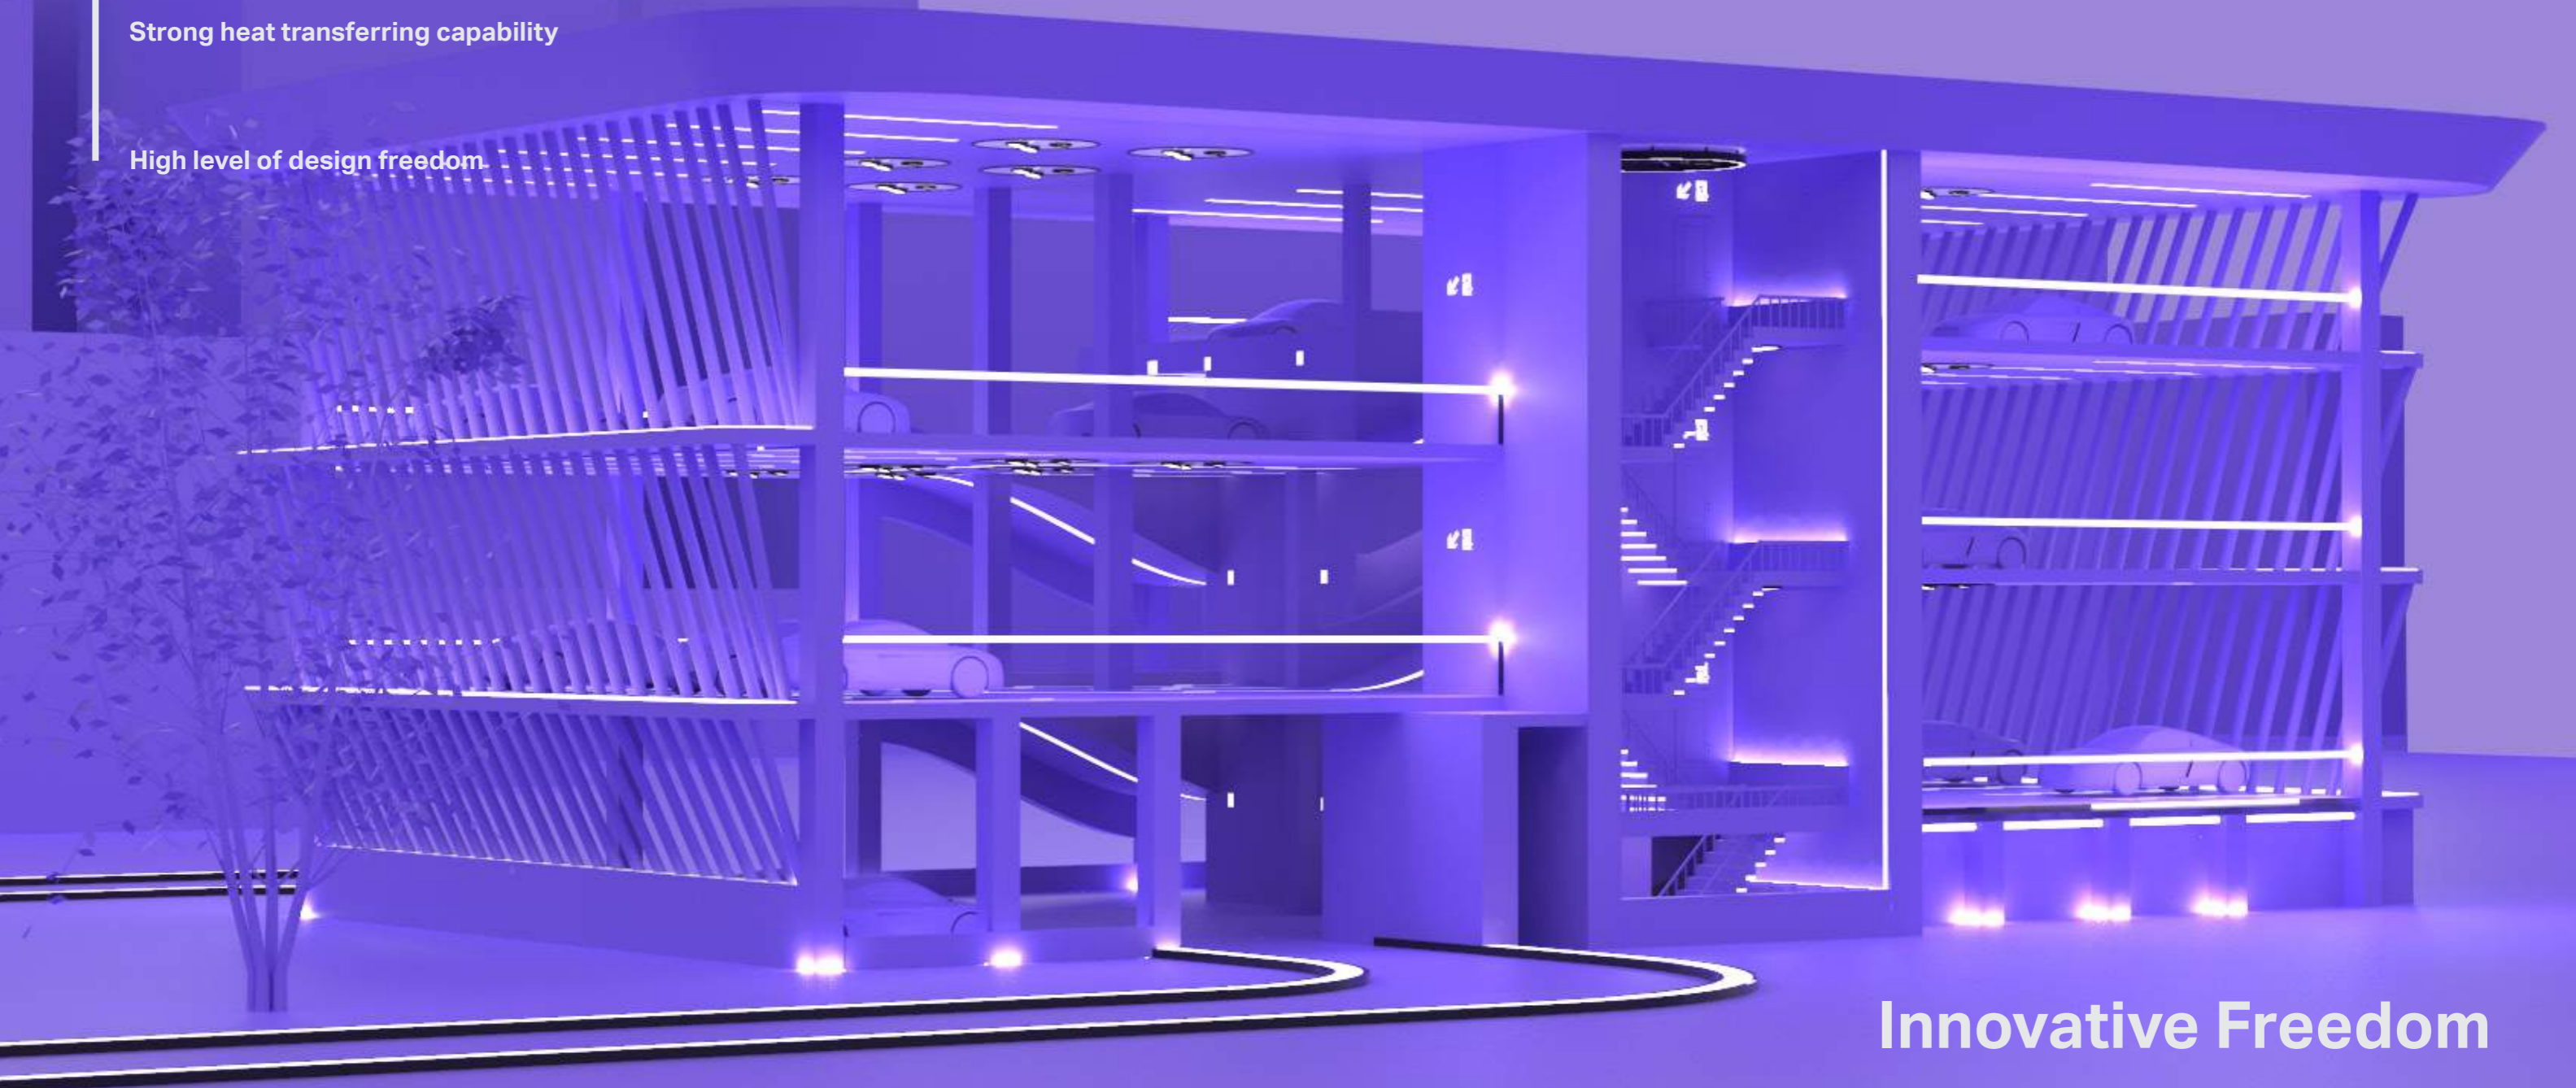


## Innovative Freedom

The Makrolon® TC grades provide you the opportunity to replace metals in heat sink applications, opening up incredible design opportunities while still keeping high dimensional stability.



# Makrolon<sup>®</sup> TC Thermal Conductive

Material Properties	Makrolon <sup>®</sup> TC611	Makrolon <sup>®</sup> TC110	Makrolon <sup>®</sup> TP0822
Thermal Conductivity in plane [W/mK]	16	1	0.8
Electrical properties	Cond.	Insul.	Insul.
Color appearance			
UL94 Classification	V-0 2.0 mm	HB	V-0: 1.5 mm 5VA: 2 mm
Charpy unnotched impact 23 °C [kJ/m <sup>2</sup> ]	<10	78	90

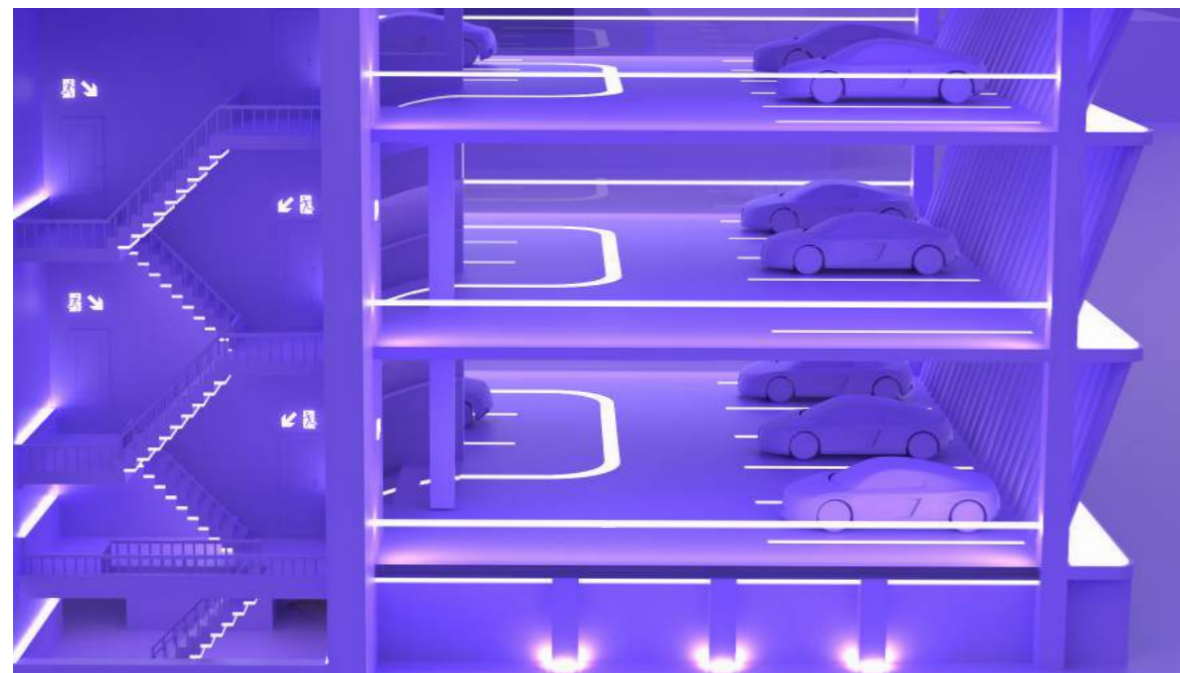

## Lighten Your Experience

Makrolon<sup>®</sup> TC helps you achieve weight savings while meeting service life requirements and high efficiency. Improve time, ergonomics and costs.



**Makrolon®**

# Edge Light Technology


**Unlock new designs**

**Well-defined light distribution**


**Edge lighting made possible in polycarbonate**

## **New Frontiers**

Free formed and microstructured light guides based on Makrolon® LED offer new design possibilities in technical luminaires and ambient lighting applications. Enabling custom illumination geometries with appealing low-glare lighting.




# Makrolon® Edge Light Technology

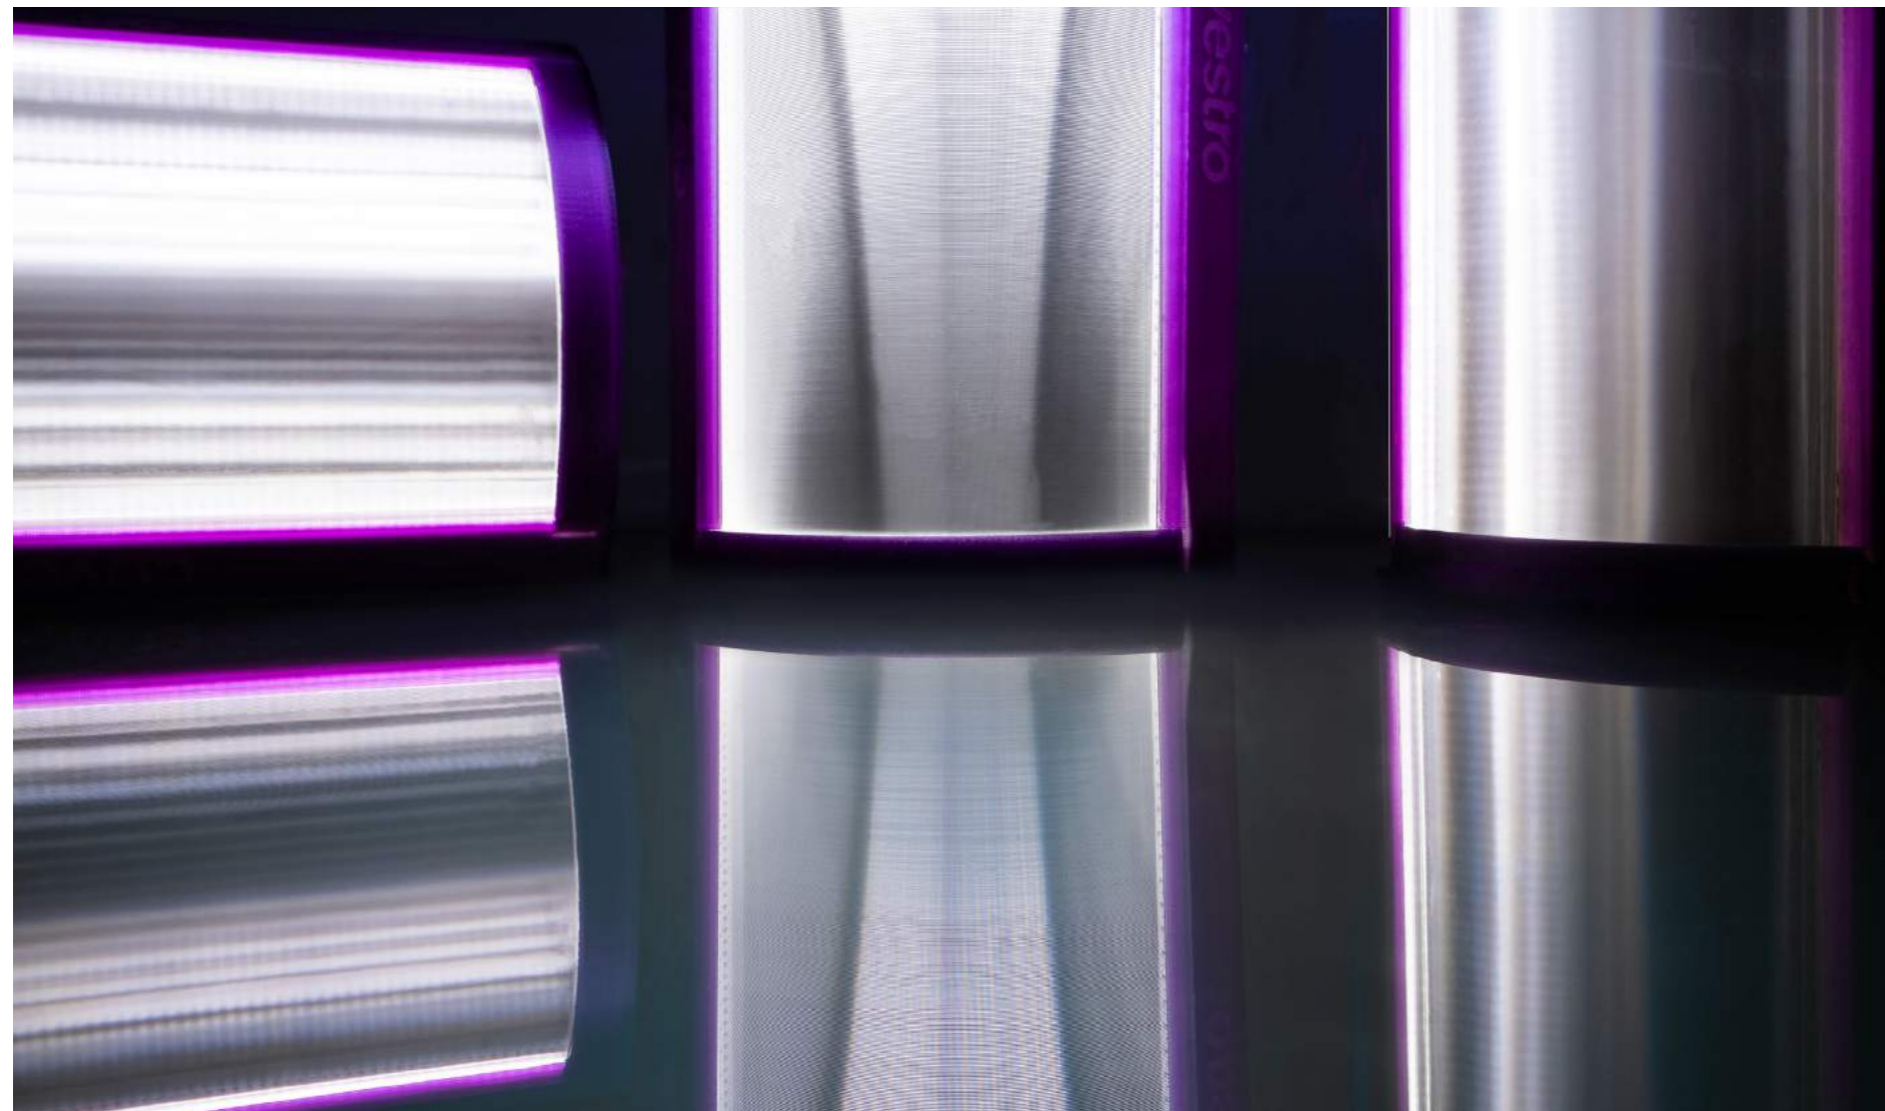

## What's Your Idea?

In collaboration with our industry partners we cover all competencies that are necessary to develop an edge lighting luminaire from the idea phase to serial production. Let's work on your idea.

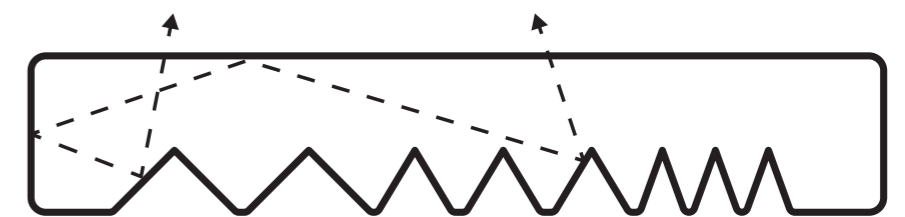

Schematic Illustration:  
Microstructured polycarbonate light guide



Covestro

# About us

## Curious, Courageous and Colorful

### Curious

We are open to new ideas and strive for progress. We are constantly looking for improvements. Curiosity drives us to listen closely and offer solutions that are creative and need-based.

### Courageous

We see opportunities where others see risks. Where others ask "why" we answer "why not?". With our knowledge and experience we can push boundaries – always with our eyes set on the future.

### Colorful

In the often dull corporate world we stand for diversity, optimism and creativity. We know that different views help to solve problems in an innovative way.

## You Are Not Just a Number

At Covestro, we feel strongly about being on equal level and on the same page as our customers. We appreciate interpersonal relationships and want to listen to and evolve with you. Your competitiveness is our success.

## Reliability is Our Priority

Our global presence makes us a reliable and flexible partner. Together we strive to find the right solutions for you needs.





Covestro

# Our Global presence



- Baytown, TX
- Newark, OH
- Antwerp
- Krefeld-Uerdingen Leverkusen
- Filago
- Greater Noida
- Map Ta Phut
- Guangzhou
- PCS HQ: Shanghai

## Find a Covestro regional office near you

### America

Covestro LLC  
1 Covestro Circle  
Pittsburgh, PA 15205

### USA

+1 412 413 2000

### Europe

Covestro Deutschland AG  
Kaiser-Wilhelm-Allee 60  
51373 Leverkusen

### Germany

+49 214 600 92000

### Asia

Covestro Polymers (China) Co. Ltd  
25/F, Building 5, Crystal Plaza  
36 Pingjiaqiao Rd, Pudong  
Shanghai 200126, P.R. China

+ 86 21 80207777

Covestro

# Makrolon® Polycarbonate



## What's Next?

The possibilities are endless. You have the ideas, we have the materials  
Go ahead and start your journey with Makrolon® for LED Lighting .



**Covestro Deutschland AG**  
Business Unit Polycarbonates  
51365 Leverkusen

[plastics.covestro.com](https://plastics.covestro.com)

This information and our technical advice - whether verbal, in writing or by ways of trial - are given in good faith but without warranty and are subject to change without notice. This also applies where proprietary rights of third parties are involved. The information is provided by Covestro AG without assumption of any liability. Our advice does not release you from the obligation to verify the information provided - especially that contained in our safety data and technical information sheets, and to check for updates of any information provided by us and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery. **Edition 2020 Order No.: COV00089097 Printed in Germany.**