



# Energy curable resins for inks and coatings

100% solids



## Building a circular future, together

**At Covestro, we use our unique skills in material solutions to make the world a brighter place. We create solutions that nourish, protect, and improve the performance of millions of products all over the globe. At the same time, our solutions contribute to a more circular world. This is reflected in our approach to the Energy Curable Industry.**

### Leading the way

The demand for more circular solutions is rising at a faster pace than ever before as the world collectively strives to tackle today's global challenges. Climate change, population growth, urbanization, digitalization and mobility are pushing players from every sector to find more sustainable solutions and lay the foundations for climate neutrality by driving a Circular Economy. The challenge is not only to create these circular solutions but also to maintain quality, durability and productivity.

### Drive to push boundaries to what is possible

Innovation is key to satisfying these demands and creating added value for customers, society and the environment by turning targets into realities. At Covestro, our long-standing expertise in aliphatic and aromatic polyisocyanates and more sustainable resins goes hand in hand with our purpose to constantly push boundaries in the search for future-oriented solutions. Through joint solutions, alternative raw materials, innovative recycling, and harnessing renewable energy, we're enabling coatings and adhesives producers to meet the circular challenge, here and now.

### Our portfolio

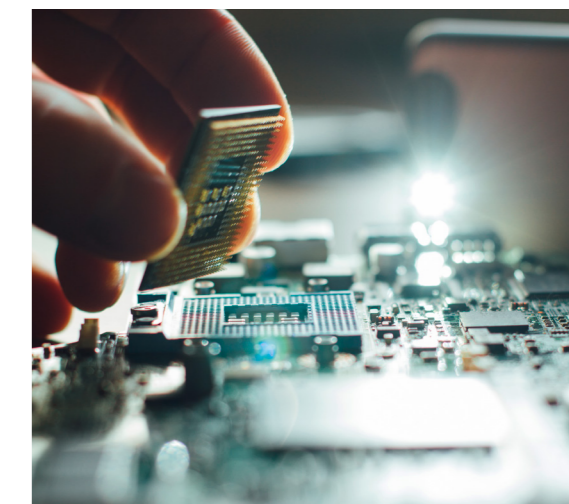
We're expanding our portfolio to include bio-based or recycled raw materials in coatings, adhesives, and specialty areas from cosmetics to textiles to 3D printing. Thanks to our mass balancing approach, we're helping close the loop by gradually replacing fossil fuels with ISCC-certified renewable resources. Our drop-in solutions ensure the high quality, consistent performance and easy processing

that keep your production running smoothly. And we're constantly working to provide the global support, facilities and supply chain security you need to forge yet more circular innovations in infrastructure, automotive, furniture and more.

### Energy curable resins

Our broad portfolio of Energy Curable Resins consists of monomers, epoxy and polyester acrylates, acrylated and solid acrylics and amine acrylates. All products are sold under the **AgiSyn™**, **NeoRad™** product ranges. The energy curable technology is used in many industrial applications. Nevertheless, it is a technology which still has many opportunities for innovation, not only to improve the performance in existing application areas, but also to take it to new markets.

Material solutions can help turn circular targets into realities. Let's make the world a brighter place, together.



## Aliphatic urethane acrylates

Of all the acrylate resins, urethane acrylates possess best balance between hardness, toughness, flexibility, chemical resistance and abrasion resistance. Due to their resistance to weathering and low yellowing, aliphatic urethane acrylates are preferred over aromatic urethane acrylates in high-end applications.

	DESCRIPTION	FUNCTIONALITY THEORETICAL VALUE		VISCOSITY PA.S AT 25°C	HYDROXYL VALUE mg KOH per gram		Tg °C	FEATURES		ADHESION			FLEXIBILITY		REACTIVITY		USA	CA	EU	CHINA
		MOLECULAR WEIGHT THEORETICAL VALUE	ACID VALUE mg KOH per gram	COLOR GARDNER	CHEMICAL RESISTANCE	HARDNESS														
<b>AgiSyn™ 230A2</b>	Aliphatic urethane acrylate	6	1,000	65-85	<2	35	<2	35		Good scratch resistance with excellent adhesion to various industrial plastics.	●●●●	●●●●●	●	●●●●●●●●	✓	✓	✓	✓		
<b>AgiSyn™ 230A4</b>	Aliphatic urethane acrylate	6	1,000	15-23	<2	33	<2			Low viscosity, high hardness and scratch resistance	●●●●	●●●●●	●	●●●●●●●●	✓	-	✓	✓		
<b>AgiSyn™ 230S1-A85</b>	Aliphatic urethane acrylate diluted with 15% TPGDA	2	1,200	60-80	<2	<10	<2	33		Good outdoor resistance	●●	●●	●●●●	●	●●	-	-	✓	✓	
<b>AgiSyn™ 230S1-B85</b>	Aliphatic urethane acrylate diluted with 15% HDDA	2	1,200	30-50	<2	<10	<2	33		Excellent outdoor resistance	●●	●●	●●●●	●	●●	-	-	✓	✓	
<b>AgiSyn™ 230T1</b>	Aliphatic urethane acrylate	2	1,500	55-75	<2	<10	<2	-25		Good flexibility, wear resistance and toughness.	●●	●	●●●●	●	●●	✓	✓	✓	✓	
<b>AgiSyn™ 242</b>	Aliphatic urethane acrylate	8	1,000	30-50	<2		<2			Very high scratch resistance providing excellent adhesion to various industrial plastics.	●●●●	●●●●●	●	●●●●●●●●	✓	-	-	✓		
<b>AgiSyn™ 2421</b>	Aliphatic urethane acrylate	8	1,300	37-83	<1	<10	<1			Excellent steelwool resistance and excellent adhesion to various industrial plastics.	●●●●	●●●●●	●●	●●●●●●●●	✓	-	-	✓		
<b>AgiSyn™ 2423</b>	Aliphatic urethane acrylate	10	1,300	35-80	<1	<10	<1			Excellent steelwool scratch resistance, high cure response with good adhesion to a wide variety of industrial plastics.	●●●●	●●●●●	●●	●●●●●●●●	-	-	-	✓		
<b>AgiSyn™ 530</b>	Aliphatic urethane acrylate diluted with 25% butyl acetate	6	1,000	2-4	<2	27	<2			Easy-To-Matt resin offering easy gloss reduction for solvent based spray coatings.	●●●●	●●●●	●	●●●●	●●●●	✓	-	-	✓	
<b>NeoRad™ U-10-15H</b>	Aliphatic urethane acrylate diluted with 15% HDDA	3	2,000	37.5-50.0	<1	<10	<2	14		General purpose resin exhibiting good alkaline resistance.	●●	●●	●●●●	●●	●●	✓	✓	✓	✓	
<b>NeoRad™ U-20-12H</b>	Aliphatic urethane acrylate diluted with 12% HDDA	2	1,200	1.9-2.3 (60°C)	<1	<10	<1	20		Excellent outdoor resistance and low yellowing.	●●	●●	●●●●	●	●●	✓	✓	✓	✓	
<b>NeoRad™ U-24-25Z</b>	Aliphatic urethane acrylate diluted with 25% HEMA	2	1,300	6-14	<1	110	<1			Very high toughness, excellent elongation and low shrinkage.	●●●●	●●	●●●●	●	●●	✓	✓	✓	✓	
<b>NeoRad™ U-25-20D</b>	Aliphatic urethane acrylate diluted with 20% DPGDA	2	1,300	20-30	<1	<10	<1	18		High reactivity, excellent flexibility, good scratch and abrasion resistance.	●●	●●	●●●●	●	●●●●	✓	✓	✓	✓	
<b>NeoRad™ U-6282</b>	Aliphatic urethane acrylate	2	1,200	0.25-0.45	<2	<10	<2	19		Low yellowing Easy-To-Matt resin offering easy gloss reduction. Based on 38% renewable carbon content.	●●	●●	●●●●	●	●●	✓	✓	✓	✓	
<b>NeoRad™ U-65</b>	Aliphatic urethane acrylate diluted with DPGDA	6	1,700	30-35	<2		<2			Deep matt by excimer cure combined with high chemical and mechanical resistance, non yellowing and high reactivity	●●●●	●●●●●	●●	●●●●	●●●●●	-	-	✓	✓	
<b>NeoRad™ U-81</b>	Aliphatic urethane acrylate	2	4,500	27-37	<2	<10	<1			Excellent adhesion to melamine papers and boards. High elasticity. Based on 26% renewable carbon content.	●●●●	●●●●●	●●	●●●●	●●●●●	-	-	✓	-	

## Aromatic urethane acrylates

DESCRIPTION	FUNCTIONALITY THEORETICAL VALUE	MOLECULAR WEIGHT THEORETICAL VALUE	VISCOSITY PA.S AT 25°C	HYDROXYL VALUE mg KOH per gram		Tg °C	FEATURES	ADHESION			FLEXIBILITY		REACTIVITY		USA	CA	EU	CHINA
				ACID VALUE mg KOH per gram	COLOR GARDNER			CHEMICAL RESISTANCE	HARDNESS									
<b>AgiSyn™ 248</b>	Aromatic urethane acrylate	3	900	0.05-0.10	<3	40	<6	19	An innovative Silky Feel resin to obtain matt overprint varnishes (OPV) for flexo and screen applications. Based on 45% renewable carbon content.	●●	●●	●●	●●	●●	✓	-	✓	✓
<b>AgiSyn™ 271</b>	Aromatic urethane acrylate	2	1,200	24-32 (60°C)	<2	<10	<1		High toughness resin for 3D printing with good reactivity and flexibility	●●●	●	●●●●	●	●●●	✓	✓	✓	✓
<b>AgiSyn™ 670A2</b>	Aromatic urethane acrylate	6	950	24.5-32.5	<2	40	<2	49	Good scratch resistance, excellent adhesion to various industrial plastics.	●●●●	●●●●	●	●●●●●●●●		✓	✓	✓	✓
<b>AgiSyn™ 670T1</b>	Aromatic urethane acrylate	2	1,600	270-330	<2	<10	<2	-24	Excellent wear resistance and toughness.	●●	●	●●●	●	●●	✓	✓	✓	✓
<b>AgiSyn™ 670T1-D75</b>	Aromatic urethane acrylate diluted with 25% DPGDA	2	1,600	5.5-7.5	<2	<10	<2	-26	Low viscosity, excellent wear resistance and toughness.	●●	●	●●●	●	●●	✓	✓	✓	✓
<b>NeoRad™ U-60</b>	Aromatic urethane acrylate	2	1,600	4.0-5.4 (60°C)	<1	<10	<2	-20	Excellent wear resistance and toughness.	●●	●	●●●	●	●●	✓	✓	✓	✓
<b>NeoRad™ U-61</b>	Aromatic urethane acrylate	2	1,200	1.2-2.0	<1	160	<2	25	Very high toughness, excellent elongation and low shrinkage. Good adhesion to various woods.	●●●	●●	●●●●	●●	●●	✓	✓	✓	✓

## Polyester acrylates

By highly favorable cost-performance ratio and very wide selection of backbone building blocks, polyester acrylates are well suited for a high number of applications. They are available in a range of viscosities and cure speeds. Generally polyester acrylates exhibit moderate to high shrinkage but still provide a well-balanced elasticity.

DESCRIPTION	FUNCTIONALITY THEORETICAL VALUE	MOLECULAR WEIGHT THEORETICAL VALUE	VISCOSITY PA.S AT 25°C	HYDROXYL VALUE mg KOH per gram		Tg °C	FEATURES	ADHESION			FLEXIBILITY		REACTIVITY		USA	CA	EU	CHINA
				ACID VALUE mg KOH per gram	COLOR GARDNER			CHEMICAL RESISTANCE	HARDNESS									
<b>AgiSyn™ 705</b>	Fatty acid modified polyester acrylate	4	1,300	100-220	<20	<20	-3	Excellent pigment grinding vehicle. Based on 56% renewable materials.	●	●●●	●●	●●	●●	✓	✓	✓	✓	
<b>AgiSyn™ 707</b>	Polyester acrylate	4	470	200-300	<1	<2		Recommended for offset inks, high viscosity, low tack, low misting and good flow.	●●	●●	●●	●●	●●	✓	✓	✓	✓	
<b>AgiSyn™ 708</b>	Polyester acrylate	2		35-60	<5	<2		Good pigment wetting & flow combined with good adhesion and reactivity	●●	●●	●●●	●●	●●	✓	✓	✓	✓	
<b>AgiSyn™ 709</b>	Polyester acrylate	2		110-130	<5	<2		Chlorine free grinding vehicle with good lithographic performance for low migration inks.	●●	●●	●●●	●●	●●	✓	✓	✓	✓	
<b>AgiSyn™ 717</b>	Fatty acid modified polyester acrylate	6	1,100	7-10	<15	30	<13	Low odour, low viscosity, low extractable, grinding, fast cure. Based on 44% renewable carbon content.	●●	●●●	●	●●●	●●	✓	-	✓	-	
<b>AgiSyn™ 720</b>	Polyester acrylate	4	1,000	0.4-1.0	<20	<2	31	Very low viscosity, good silica wetting.	●●	●	●●	●	●●	✓	-	✓	✓	
<b>AgiSyn™ 730</b>	Polyester acrylate	3	750	15-20	<5	<4	64	General purpose resin providing good stain resistance and silica wetting.	●●	●●●	●●●	●●●	●●	-	-	✓	✓	
<b>NeoRad™ P-11</b>	Polyester acrylate	3	750	25-45 (23°C)	<20	40	<4	7	Excellent silica wetting and good wear resistance.	●●	●●●	●●●	●	●●●	✓	✓	✓	✓
<b>NeoRad™ CQ P-12</b>	Polyester acrylate	3	750	12.5-22.5 (23°C)	<10	30	<3		Versatile, partly bio-based (52%) resin with good wetting and resistance properties. Highly recommended for flooring and furniture use.	●●	●●●	●●●	●	●●	-	-	✓	✓
<b>NeoRad™ P-50</b>	Polyester acrylate	4	1,100	1.5-2.1 (23°C)	<10	55	<2		Low odour, low extractable and low viscous flexo pigment grinding vehicle with good adhesion to various plastic substrates. Based on 13% renewable carbon content.	●●●	●●	●●	●●	●●●●	✓	✓	✓	✓

● Low ●● Moderate ●●● Good ●●●● Excellent ✓ Available - Not available

## Epoxy acrylates

Epoxy acrylates are widely used in radiation curable formulations due to their cost-performance ratio combined with high reactivity. Cured coatings comprising of epoxy acrylates generally exhibit high gloss, high hardness and very high chemical resistance. The fatty acid modified epoxy acrylates provide some improved wetting and flexibility.

DESCRIPTION	FUNCTIONALITY THEORETICAL VALUE		VISCOSITY PA.S AT 25°C	HYDROXYL VALUE mg KOH per gram		Tg °C	FEATURES	ADHESION		FLEXIBILITY		REACTIVITY		USA	CA	EU	CHINA	
	MOLECULAR WEIGHT THEORETICAL VALUE	ACID VALUE mg KOH per gram	COLOR GARDNER	CHEMICAL RESISTANCE	HARDNESS													
<b>AgiSyn™ 1010*</b>	Bisphenol A epoxy acrylate	2	500	4-7 (60°C)	<2	220	<1	60		Multi purpose resin offering good mechanical properties.	●	●●●●	●	●●●●●●●●	✓	✓	✓	✓
<b>AgiSyn™ 1030*</b>	Bisphenol A epoxy acrylate	2	500	11-21 (50°C)	<2	220	<1	60		Multi purpose resin offering good wear resistance.	●	●●●●	●	●●●●●●●●	✓	✓	✓	✓
<b>AgiSyn™ 1050*</b>	Bisphenol A epoxy acrylate	2	500	2.0-4.5 (65°C)	<1	220	<3	60		Multi purpose resin with silica wetting.	●	●●●●	●	●●●●●●●●	✓	✓	✓	✓

## Modified epoxy acrylates

DESCRIPTION	FUNCTIONALITY THEORETICAL VALUE		VISCOSITY PA.S AT 25°C	HYDROXYL VALUE mg KOH per gram		Tg °C	FEATURES	ADHESION		FLEXIBILITY		REACTIVITY		USA	CA	EU	CHINA		
	MOLECULAR WEIGHT THEORETICAL VALUE	ACID VALUE mg KOH per gram	COLOR GARDNER	CHEMICAL RESISTANCE	HARDNESS														
<b>AgiSyn™ 2020</b>	Epoxidized soya oil acrylate	3	1,100	23-33	<5	130	<7	35		General purpose resin with excellent pigment wetting properties. Based on 83% renewable carbon content.	●	●●	●	●●	●●	✓	✓	✓	✓
<b>AgiSyn™ 2021</b>	Epoxidized soya oil acrylate	3	1,100	8-15	<8		<9			Bisphenol A free and low TPP version of AgiSyn™ 2020. Based on 90% renewable carbon content.	●	●●	●	●●	●●	✓	✓	✓	✓
<b>AgiSyn™ 3020-A80</b>	Modified epoxy acrylate diluted with 20% TPGDA	2	1,200	32-48	<5	70	<2	51		Tough epoxy acrylate exhibiting excellent metallization acceptance.	●●	●●●●	●●●●	●●●●	●●●●	✓	-	-	-
<b>AgiSyn™ 3050</b>	Modified epoxy acrylate	2	1,000	3.0-7.5 (60°C)	<5		<4	57		Tough epoxy acrylate offering excellent pigment wetting.	●●	●●●●	●●●●	●●●●	●●●●	✓	-	-	-
<b>AgiSyn™ 6050TF</b>	Amine modified epoxy acrylate	2	500	68-85	<1		<1			Very fast curing epoxy acrylate to be used for Toluene Free applications.	●	●●●●	●	●●●●●●●●	-	-	✓	✓	
<b>NeoRad™ E-20</b>	Fatty acid modified epoxy acrylate	2	550	2-4 (60°C)	<3	200	<3	43		Multi purpose resin offering good pigment wetting.	●	●●●●	●	●●●●●●●●	✓	✓	-	✓	

\* AgiSyn™ 1010, AgiSyn™ 1030 and AgiSyn™ 1050 are also available in diluting acrylates. Please contact your local account manager.

# Acrylics

Acrylics provide reduced shrink to a coating and achieve improved adhesion. Additionally depending on chemistry and use acrylics provide hardness and flexibility to an energy curable coating system. Inert acrylics are available as a solid material (also known as beads) and as a liquid in diluting acrylates.

DESCRIPTION	FUNCTIONALITY THEORETICAL VALUE	MOLECULAR WEIGHT THEORETICAL VALUE	VISCOSITY PA.S AT 25°C	HYDROXYL VALUE mg KOH per gram		Tg °C	FEATURES	ADHESION	FLEXIBILITY	REACTIVITY	REGIONS						
				ACID VALUE mg KOH per gram	COLOR GARDNER						CHEMICAL RESISTANCE	HARDNESS	USA	CA	EU	CHINA	
<b>AgiSyn™ 260-AB50</b>	Inert	42,000	14-21	<1	30	<3	30	Resin for primers and white basecoats offering excellent adhesion to difficult substrates.	●●●	●	●●●	●●	●●	-	-	✓	✓
<b>AgiSyn™ 268-B70</b>	Inert	35,000	3-5	<1		<3	51	Low viscosity resin for primers and white basecoats offering excellent adhesion to difficult substrates.	●●●●	●	●●●	●	●	-	-	✓	✓
<b>NeoCryl® B-300</b>	Inert	15,000	0.7-1.3*	<1	<1	White powder	45	Low viscosity when dissolved in diluting acrylates, good scratch resistance.	●●●●	●	●●	●●	●	✓	✓	✓	✓
<b>NeoCryl® B-302</b>	Inert	5,000	0.4-0.8*	4	<1	White powder	80	Low viscosity when dissolved in diluting acrylates, high Tg. Based on 32% renewable carbon content.	●●●●	●●	●●	●●	●	✓	✓	✓	✓
<b>NeoRad™ A-20</b>	20	30,000	0.5-1.0 (23°C)	<15	150	<4	42	Suitable for for dual cure. Good outdoor durable and excellent anti-sagging properties.	●●	●●●	●	●●●	●●●	✓	✓	✓	✓

# Amine modified acrylates

The typical combination of high cure speeds and overall balanced properties makes the amine modified acrylates unique. Often these resins are used to increase the cure speed without compromising on other coating characteristics.

DESCRIPTION	FUNCTIONALITY THEORETICAL VALUE	MOLECULAR WEIGHT THEORETICAL VALUE	VISCOSITY PA.S AT 25°C	AMINE VALUE mg KOH per gram		Tg °C	FEATURES	ADHESION	FLEXIBILITY	REACTIVITY	REGIONS						
				ACID VALUE mg KOH per gram	COLOR GARDNER						CHEMICAL RESISTANCE	HARDNESS	USA	CA	EU	CHINA	
<b>AgiSyn™ 701</b>	4	1,000	2.5-3.5	<1	55-65	<2	50	Excellent reactivity, good wetting, suitable for LED cure.	●●	●●	●●	●	●●●●	✓	✓	✓	✓
<b>AgiSyn™ 703</b>	4	1,000	0.45-0.65	<1	35-45	<2	6	Low viscosity and high scratch resistance, suitable for LED cure.	●●	●●	●●	●●	●●●●	✓	-	✓	✓
<b>AgiSyn™ 703TF</b>	4	1,000	0.45-0.65	<1	35-45	<1	6	Toluene free version of AgiSyn™ 703.	●●	●●	●●	●●	●●●●	✓	-	✓	✓
<b>NeoRad™ P-85</b>	6	1,400	0.3-0.7 (23°C)	<10	10-15	<6	24	Good scratch resistance and good wetting.	●●	●●●	●	●●	●●●●	-	-	✓	✓

\* 40% solution in HDDA








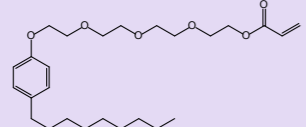

● Low ●● Moderate ●●● Good ●●●● Excellent ✓ Available - Not available

## Amine synergists

Amine synergists are co-initiators which enhance the reactivity of UV curable systems. Best performance is achieved when combined with Norrish type II initiators. The acrylate functionality ensures this type of synergist is being incorporated in the final coating structure.

DESCRIPTION	FUNCTIONALITY THEORETICAL VALUE		VISCOSITY PA.S AT 25°C	AMINE VALUE mg KOH per gram		T <sub>g</sub> °C	FEATURES	ADHESION	FLEXIBILITY	REACTIVITY	USA	CA	EU	CHINA					
	MOLECULAR WEIGHT THEORETICAL VALUE	ACID VALUE mg KOH per gram	COLOR GARDNER	CHEMICAL RESISTANCE	HARDNESS														
<b>AgiSyn™ 002</b>	Functionalised amine synergist	1	400	0.01-0.03	<1	190-210	<2	11		Multi purpose synergist offering very high reactivity, suitable for LED cure.	●	●●	●	●	●●●●●	✓	✓	✓	✓
<b>AgiSyn™ 003</b>	Functionalised amine synergist	1	500	3.0-4.5	<1	250-270	<6	17		Highest amine content and excellent reactivity booster.	●	●	●	●	●●●●●	✓	-	-	-
<b>AgiSyn™ 008</b>	Functionalised amine synergist	2	800	0.5-1.5	<1	120-150	<2	13		High reactivity and good adhesion, suitable for LED cure.	●●	●●	●	●	●●●●●	✓	✓	✓	✓
<b>AgiSyn™ 008TF</b>	Functionalised amine synergist	2	800	0.5-1.5	<1	120-150	<2	13		Toluene free version of AgiSyn™ 008.	●●	●●	●	●	●●●●●	✓	✓	✓	✓

# Mono-functional diluting acrylates

DESCRIPTION	CAS NUMBER	MOLECULAR WEIGHT THEORETICAL VALUE	VISCOSITY MPA.S AT 25°C		ACID VALUE mg KOH per gram	COLOR APHA	STABILIZER ppm MeHQ	REFRACTIVE INDEX		Tg °C	FEATURES	TOLUENE FREE	USA	CA	EU	CHINA
<b>AgiSyn™ 2820</b> 1-methylheptyl acrylate 	42928-85-8	184	1-3	<0.2	<100	100-200					- 74% renewable carbon content - Excellent flexibility - Good adhesion	1)	✓	-	✓	-
<b>AgiSyn™ 2822</b> Ethoxylated (2) 2-Phenoxy ethyl acrylate 	56641-05-5	236	12-22	<0.5	<60	400-800	1.505		-45		- Strong dilution effect - Low shrinkage - Excellent adhesion (various plastics and metals) - High refractive index	1)	✓	✓	-	✓
<b>AgiSyn™ 2832</b> 2-Phenoxy ethyl acrylate 	48145-04-6	192	5-15	<0.5	<60	200-600	1.515		7		- Strong dilution effect - Low shrinkage - Excellent adhesion (various plastics and metals) - High refractive index	1)	✓	✓	✓	✓
<b>AgiSyn™ 2839</b> Tetrahydrofurfuryl acrylate 	2399-48-6	156	3-12	<0.5	<80	400-800					- Good diluting power - Good adhesion - Good flexibility	1)	✓	-	-	✓
<b>AgiSyn™ 2852</b> Cyclic trimethylpropane formal acrylate 	66492-51-1	200	15-20	<0.5	<200	100-200	1.467		40		- Low odour - Excellent adhesion (various plastics and metals) - Good abrasion and chemical resistance		✓	✓	-	✓
<b>AgiSyn™ 2870</b> Isobornyl acrylate 	5888-33-5	208	5-15	<0.1	<30	90-275	1.474		80		- 79% renewable carbon content - High Tg and good flexibility - Excellent adhesion to a variety of substrates - Good outdoor resistance		✓	✓	✓	✓
<b>AgiSyn™ 2880</b> 2-(2-ethoxyethoxy)ethyl acrylate 	7328-17-8	188	3-8	<0.5	<60	200-600	1.435		-53		- High flexibility - Good adhesion - Strong dilution effect	1)	✓	✓	✓	✓
<b>AgiSyn™ 2895</b> Ethoxylated (4) nonylphenol acrylate 	50974-47-5	450	103-117	<0.1	<150	800-1300	1.493		-28		- Excellent adhesion properties - Excellent dilution effect - High cure response	1)	✓	-	✓	✓
<b>AgiSyn™ 2896</b> Lauryl acrylate 	2156-97-0	240	4-10	<0.5	<30	100-200	1.444		-28		- 80% renewable carbon content - Low surface tension - Good adhesion	1)	✓	✓	✓	✓






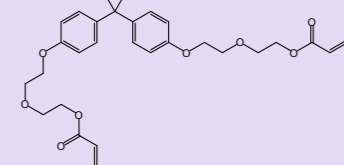
1) Also available as Toluene Free version (TF grade)

2) Also available as High Purity version (P grade)

✓ Available  
- Not available



## Di-functional diluting acrylates



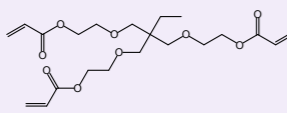
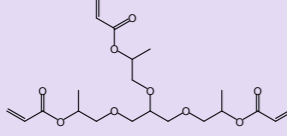

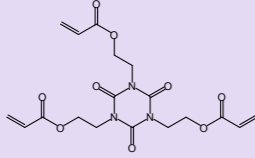
DESCRIPTION	MOLECULAR WEIGHT THEORETICAL VALUE	VISCOSITY MPA.S AT 25°C		ACID VALUE mg KOH per gram	COLOR APHA	STABILIZER ppm MeHQ	REFRACTIVE INDEX	Tg °C	FEATURES	USA	CA	EU	CHINA
<b>AgiSyn™ 2815</b> Tripropyleneglycol diacrylate 	300	10-18	<0.1	<100	200-1,000	1.450	64	<ul style="list-style-type: none"> <li>- Multi purpose acrylate</li> <li>- Good dilution effect</li> </ul>	✓	✓	✓	✓	
<b>AgiSyn™ 2816</b> 1,6-Hexanediol diacrylate 	226	5-10	<0.1	<60	100-300	1.457	41	<ul style="list-style-type: none"> <li>- Multi purpose acrylate</li> <li>- Excellent adhesion to plastics</li> <li>- Strong dilution effect</li> <li>- Good outdoor resistance</li> </ul>	✓	✓	✓	✓	
<b>AgiSyn™ 2823</b> Ethoxylated (30) bisphenol A diacrylate 	1,672	700-1,000	<0.2	<200	100-300			<ul style="list-style-type: none"> <li>- Good flexibility resistance</li> <li>- Good heat resistance</li> <li>- Good pigment wetting</li> </ul>	✓	✓	✓	✓	
<b>AgiSyn™ 2833</b> Dipropyleneglycol diacrylate 	242	7-13	<0.5	<40	400-800	1.449	96	<ul style="list-style-type: none"> <li>- Multi purpose acrylate</li> <li>- Good dilution effect</li> <li>- High Tg</li> </ul>	✓	✓	✓	✓	
<b>AgiSyn™ 2873</b> Ethoxylated (10) bisphenol A diacrylate 	777	0.6-0.8	<0.1	<100	100-300	1.514	2	<ul style="list-style-type: none"> <li>- Good chemical resistance</li> <li>- Good flexibility</li> <li>- Good heat resistance</li> <li>- Low shrinkage</li> </ul>	✓	✓	✓	✓	
<b>AgiSyn™ 2881</b> Ethoxylated (4) bisphenol A diacrylate 	512	1,000-1,300	<0.5	<100	200-800	1.538	63	<ul style="list-style-type: none"> <li>- Good chemical resistance</li> <li>- Good heat resistance</li> <li>- Good pigment wetting</li> </ul>	✓	✓	✓	✓	

1) Also available as Toluene Free version (TF grade)

2) Also available as High Purity version (P grade)

 ✓ Available  
 - Not available

## Multi-functional diluting acrylates




DESCRIPTION	MOLECULAR WEIGHT THEORETICAL VALUE	VISCOSITY MPA.S AT 25°C		ACID VALUE mg KOH per gram	COLOR APHA	STABILIZER ppm MeHQ	REFRACTIVE INDEX	Tg °C	FEATURES	TOLUENE FREE	HIGH PURITY			
							USA				CA	EU	CHINA	
<b>AgiSyn™ 2811</b> Trimethylolpropane triacrylate 	296	70-120	<0.1	<60	100-300	1.474	64	- Multi purpose acrylate - High reactivity		✓	✓	✓	✓	
<b>AgiSyn™ 2830L</b> Dipentaerythritol hexaacrylate 	578	4,000-7,000	<0.5	<100	300-900	1.496	94	- Very high reactivity - High crosslink density - Excellent scratch resistance - Excellent chemical resistance	2)	✓	-	✓	✓	
<b>AgiSyn™ 2836</b> Ethoxylated (3) trimethylolpropane triacrylate 	428	40-80	<0.2	<60	250-500	1.471	37	- Multi purpose acrylate - Good reactivity - Good chemical resistance	2)	✓	✓	✓	✓	
<b>AgiSyn™ 2837</b> Propoxylated (3) glyceryl triacrylate 	428	70-100	<0.5	<100	200-500	1.461	33	- Multi purpose acrylate - Excellent wetting - Good reactivity	2)	✓	✓	✓	✓	
<b>AgiSyn™ 2844</b> Ethoxylated (5) pentaerythritol tetraacrylate 	550	100-200	<1.0	<60	200-600	1.475	-33	- High reactivity - Good scratch resistance - Good solvent resistance	2)	✓	-	✓	✓	
<b>AgiSyn™ 2851S</b> Tris (2-hydroxy ethyl) isocyanurate triacrylate 	423	Wax	<1.0	<100	300-1,200	1.465	247	- Extremely high Tg - Excellent abrasion resistance - Very good heat resistance - High reactivity		✓	✓	-	✓	

1) Also available as Toluene Free version (TF grade)

2) Also available as High Purity version (P grade)

✓ Available  
- Not available

## Multi-functional diluting acrylates

DESCRIPTION	MOLECULAR WEIGHT THEORETICAL VALUE	VISCOSITY MPA.S AT 25°C		ACID VALUE mg KOH per gram	COLOR APHA	STABILIZER ppm MeHQ	REFRACTIVE INDEX	Tg °C	FEATURES	TOLUENE FREE	HIGH PURITY			
											USA	CA	EU	CHINA
<b>AgiSyn™ 2884</b> Mixture of Pentaerythritol tri- and tetraacrylate 	298	650-1,200	<1.0	<100	300-990	1.484	100	- Hydroxyl functional acrylate (typical OH value = 125mg KOH/g) - High reactivity - Good adhesion		✓	✓	✓	✓	
<b>AgiSyn™ 2887E</b> Di-trimethylolpropane tetraacrylate 	466	400-700	<0.5	<100	400-600	1.475	98	- Fast cure response - Excellent chemical resistance - Good hardness	1)	✓	✓	-	✓	
<b>AgiSyn™ 2887HV-TF</b> Di-trimethylolpropane tetraacrylate 	482	750-850	<0.5	<50	200-600	1.475	96	- High viscous grade of AgiSyn™ 2887E	1)	✓	✓	✓	✓	

1) Also available as Toluene Free version (TF grade)

2) Also available as High Purity version (P grade)

✓ Available  
- Not available

## UVR biobased portfolio

Biobased materials are manufactured from renewable sources, natural plant-based sources. The natural carbon (C14) can be measured and quantified versus fossil based carbon (C12). All biobased content in our acrylate resin and diluent products comes from natural sources, which is backed up by certified external analysis. The biobased carbon content is noted as a percentage of total carbon content, not as weight percentage of the total commercial product. More detailed product information can be found on the previous pages.

	DESCRIPTION	BIOBASED CARBON CONTENT	FEATURES	REGIONS			
				USA	CA	EU	CHINA
<b>AgiSyn™ 2020</b>	Epoxidized soya oil acrylate	<b>83%</b>	General purpose resin with excellent pigment wetting properties. Based on 83% renewable carbon content.	✓	✓	✓	✓
<b>AgiSyn™ 2021</b>	Epoxidized soya oil acrylate	<b>90%</b>	Bisphenol A free and low TPP version of AgiSyn™ 2020. Based on 90% renewable carbon content.	✓	✓	✓	✓
<b>AgiSyn™ 2896</b>	Lauryl acrylate	<b>80%</b>	- 80% renewable carbon content - Low surface tension - Good adhesion	✓	✓	✓	✓
<b>AgiSyn™ 2870</b>	Iso bornyl acrylate	<b>79%</b>	- 79% renewable carbon content - High Tg and good flexibility - Excellent adhesion to a variety of substrates - Good outdoor resistance	✓	✓	✓	✓
<b>AgiSyn™ 2820</b>	2-Octyl acrylate	<b>74%</b>	- 74% renewable carbon content - Excellent flexibility - Good adhesion	✓	-	✓	-
<b>AgiSyn™ 705</b>	Fatty acid modified polyester acrylate	<b>56%</b>	Excellent pigment grinding vehicle. Based on 56% renewable materials.	✓	✓	✓	✓
<b>AgiSyn™ 248</b>	Silky feel urethane acrylate	<b>45%</b>	An innovative Silky Feel resin to obtain matt overprint varnishes (OPV) for flexo and screen applications. Based on 45% renewable carbon content.	✓	-	✓	✓
<b>AgiSyn™ 717</b>	Fatty acid modified polyester acrylate	<b>44%</b>	Low odour, low viscosity, low extractable, grinding, fast cure. Based on 44% renewable carbon content.	✓	-	✓	-
<b>NeoRad™ U-6282</b>	Easy-To-Matt urethane acrylate	<b>38%</b>	Low yellowing Easy-To-Matt resin offering easy gloss reduction. Based on 38% renewable carbon content.	✓	✓	✓	✓
<b>NeoCryl® B-302</b>	Solid methacrylic copolymer [inert]	<b>32%</b>	Low viscosity when dissolved in diluting acrylates, high Tg. Based on 32% renewable carbon content.	✓	✓	✓	✓
<b>NeoRad™ CQ P-12</b>	Polyester acrylate	<b>52%</b>	Versatile, partly bio-based (52%) resin with good wetting and resistance properties. Highly recommended for flooring and furniture use.	-	-	✓	✓
<b>NeoRad™ U-81</b>	Aliphatic urethane acrylate	<b>26%</b>	Excellent adhesion to melamine papers and boards. High elasticity. Based on 26% renewable carbon content.	-	-	✓	-
<b>AgiSyn™ 720</b>	Polyester acrylate	<b>15%</b>	Very low viscosity, good silica wetting.	✓	-	✓	✓
<b>AgiSyn™ 2837</b>	Propoxylated glyceryl triacrylate	<b>14%</b>	- Multi purpose acrylate - Excellent wetting - Good reactivity	✓	✓	✓	✓
<b>NeoRad™ P-50</b>	Polyester acrylate	<b>13%</b>	Low odour, low extractable and low viscous flexo pigment grinding vehicle with good adhesion to various plastic substrates. Based on 13% renewable carbon content.	✓	✓	✓	✓
<b>AgiSyn™ 701</b>	Amine modified acrylate	<b>13%</b>	Excellent reactivity, good wetting, suitable for LED cure.	✓	✓	✓	✓
<b>NeoRad™ E-20</b>	Fatty acid modified bisphenol A epoxy acrylate	<b>12%</b>	Multi purpose resin offering good pigment wetting.	✓	✓	-	✓



Covestro Deutschland AG  
Kaiser-Wilhelm-Allee 60  
51373 Leverkusen  
Germany

[www.covestro.com](http://www.covestro.com)

The manner in which you use our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, is beyond our control. Therefore, it is imperative that you test our products to determine suitability for your processing and intended uses. Your analysis must at least include testing to determine suitability from a technical, health, safety, and environmental and regulatory standpoint. Such testing has not necessarily been done by Covestro, and Covestro has not obtained any approvals or licenses for a particular use or application of the product, unless explicitly stated otherwise. If the intended use of the product is for the manufacture of a pharmaceutical/medicinal product, medical device<sup>1</sup> or of pre-cursor products for medical devices or for other specifically regulated applications which lead or may lead to a regulatory obligation of Covestro, Covestro must explicitly agree to such application before the sale. Any samples provided by Covestro are for testing purposes only and not for commercial use. Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale which are available upon request. All information, including technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed by you that you assume and hereby expressly release and indemnify us and hold us harmless from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with any claim of any patent relative to any material or its use. No license is implied or in fact granted under the claims of any patent. These values are typical values only. Unless explicitly agreed in written form, they do not constitute a binding material specification or warranted values. Values may be affected by the design of the mold/die, the processing conditions and coloring/pigmentation of the product. Unless specified to the contrary, the property values given have been established on standardized test specimens at room temperature.

<sup>1</sup>Please see the "Guidance on Use of Covestro Products in a Medical Application" document.

Edition: 2025